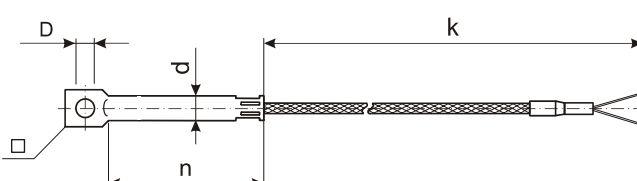


CABLE PROBE WITH SCREW FIXING FOR SURFACE MEASUREMENT AT (TSAT) Sheath - stainless steel (see table notes) Cable - see table notes	SENSITIVE ELEMENT	CABLE TYPE	TEMPERATURE RANGE	DIMENSIONS													
				d [mm]	wires												
 <p>n = 20 ... 30 mm k = 1 ... 10 m</p> <table border="1" data-bbox="279 974 582 1097"> <tr> <td>d</td> <td>4</td> <td>5</td> <td>6</td> </tr> <tr> <td>□</td> <td>6x6</td> <td>7x7</td> <td>8x8</td> </tr> <tr> <td>D</td> <td>3</td> <td>3, 4</td> <td>3, 4, 5</td> </tr> </table>	d	4	5	6	□	6x6	7x7	8x8	D	3	3, 4	3, 4, 5	RTD Design				
	d	4	5	6													
	□	6x6	7x7	8x8													
	D	3	3, 4	3, 4, 5													
	1 x Pt (RB,RD,RF,RG)	SLSL, TSL, TT, YY, UU, YU GLGL	T9	-50...200 °C	4, 5	2, 3*											
			T12	-50...100 °C	6	2, 3, 4*											
	2 x Pt (RB,RD,RF,RG)	GLGL TT	T7	0...200 °C	6	2x2											
			T8	0...400 °C													
	1 x PTC (RP, RQ)	SLSL, TSL, YY, UU, YU GLGL, TT	T12	-50...100 °C	6	2, 3											
			T19	0...100 °C													
Thermocouple Design																	
1 x K, 1 x J, 1 x T	SLSL, TSL, YY, UU, YU GLGL, TT	T9	-50...200 °C	4, 5, 6	2												
<p>Sheath material: 1.4301 (M1), 1.4541 (M2), 1.4571 (M3), 1.4404 (M9), 2.4816 (M8)</p> <p>Cable type: - GLGLP(V) (glass fiber w/ steel braid, max. 400 °C ambient temperature) - SLSL or TSL (silicone, max. 250 °C ambient temperature) - TT (Teflon®, max. 250 °C ambient temperature) - YY (PVC, max. 100 °C ambient temperature) - UU or YU (PUR, max. 80 °C ambient temperature)</p> <p>Tip shape: - RTD: standard - T/C: standard (isolated) or grounded (see Appendix - Tip shapes)</p> <p>Accuracy class: - RTD: 'A', 'B', or '2xB' - T/C: '1' or '2' (see Appendix - RTD or T/C Tolerance)</p> <p>Cable connector: 4-pin (C3), 'T/C standard' (C5) or 'T/C miniature' (C6) (see Appendix - Connectors)</p>																	
* Please contact COMECO!																	

Ordering code TSAT - G1G2.G3.G4.G5.G6.G8.G10.G11.G12.G14.G15 - #1

Code	Feature or option	Code values	
G1	Number of sensors	1 or 2	
G2	Sensor	RB - Pt50, RD - Pt100, RF - Pt500, RG - Pt1000, RP - PTC 1k, RQ - PTC 2k, J - T/C type "J", K - T/C type "K", T - T/C type "T"	
G3	Temperature range	T7 - 0...200 °C, T8 - 0...400 °C, T9 - -50...200 °C, T12 - 50...100 °C, T19 - 0...100 °C, T22 - -200...200 °C	
G4	Diameter 'd' [mm]	4, 5, 6	
G5	Diameter 'D' [mm] ⁽¹⁾	3, 4, 5	
G6	Probe length 'n' [mm]	20...30	
G8	Cable length 'k' [m] and type	1GL...10GL - glass fiber, 1SL...10SL - silicone, 1TF...10TF - Teflon®, 1PU...10PU - polyurethane ⁽⁵⁾ , 1PV...10PV - PVC	
G10	Sheath material (wetted parts)	M1 - 1.4301, M2 - 1.4541, M3 - 1.4571, M9 - 1.4404	
G11	Accuracy class	RTD	X - none ⁽²⁾ , A - 'A', B - 'B', C - '2xB'
		T/C	1 - '1' ⁽⁵⁾ , 2 - '2'
G12	Number of wires ⁽³⁾	2, 3, 4 ⁽⁵⁾	
G14	Tip shape (hot junction) ⁽⁴⁾	X - standard (isolated from sheath), G - grounded	
G15	Connector	X - none, C3 - 4-pin male plug-in connector ø8 (for H5700 thermometer only), C5 - T/C connector, C6 - miniature T/C connector	
		X - none, OV - vibration proof (MgO or Silicone filled), OS - cable protection SS spring (≈ 50 mm), OB - braid termination lead (only w/o connector), OP - electrochemically polished sheath surface	
#1	Options	X - none, OV - vibration proof (MgO or Silicone filled), OS - cable protection SS spring (≈ 50 mm), OB - braid termination lead (only w/o connector), OP - electrochemically polished sheath surface	

⁽¹⁾ Applicable for the selected diameter 'd'

⁽²⁾ For non-Pt sensors

⁽³⁾ Only for RTD sensors!

⁽⁴⁾ Only for thermocouples!

⁽⁵⁾ Contact COMECO!