

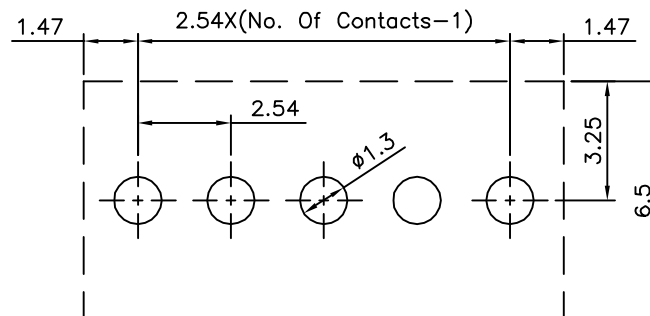
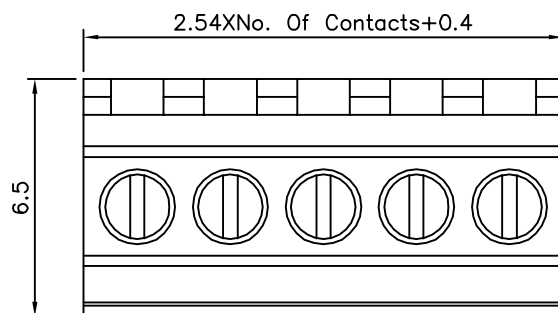


△ SPECIFICATION

Voltage Rating:150V AC
 Current Rating:6 Amp/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2000V AC For 1 Minute
 Test Time=60s/1 PCS
 Wire Range:18~30 AWG
 Torque:1.5 Kgf.cm/M1.6
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:
 Test Temperature=250°C±10°C/5s Max.
 Contact:Copper Alloy,Nickel Plated
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide(UL94V-0),Green
 RoHS Compliant

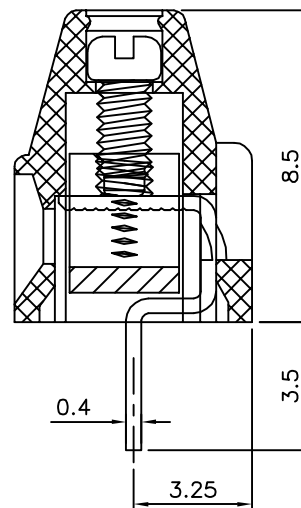

Recommended P.C.B. Layout

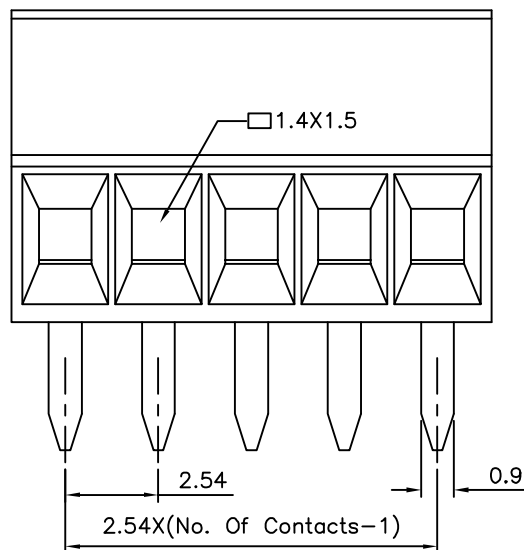

DRAWING No.

20284

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT mm



SCALE

NONE

REV.

A2

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

△ A2	Modify Data	HZF	09/14/2013
△ A1	Modify Data	HZF	07/22/2013
△ A0	NEW RELEASE	HZF	07/26/2009