
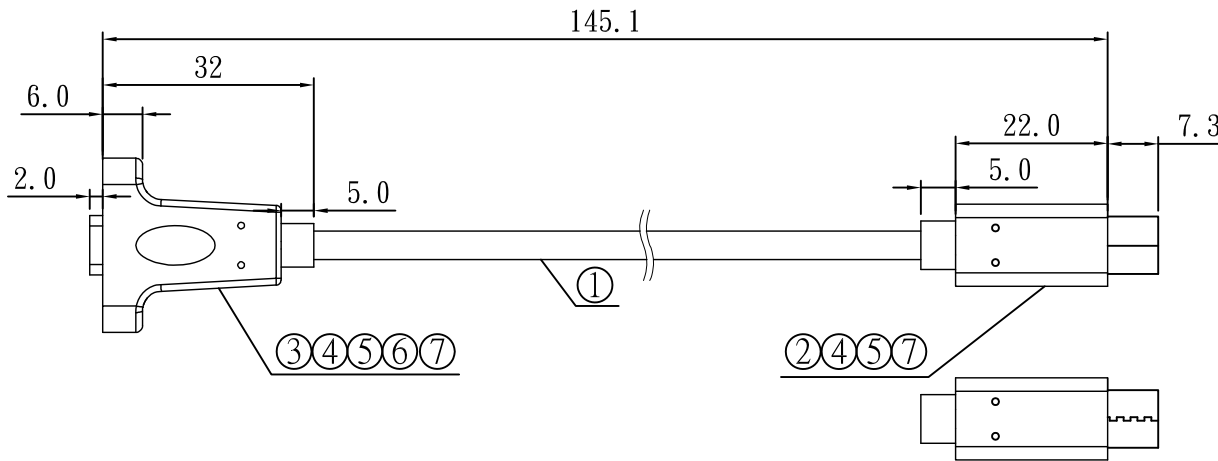



REV	ECRN	DATE
1	NEW PRODUCTION	20190515

P1



P2





PIN WIRING

P1	P2	
A4, B4, A9, B9	RED(24AWG)	A4, B4, A9, B9
A1, B1, A12, B12	DRAIN*2	A1, B1, A12, B12
A5	BLUE(32AWG)	A5
B5	YELLOW(32AWG)	B5
A6	GREEN	A6
A7	WHITE	A7
A2	YELLOW(RED MYLAR)	A2
A3	BLUE(RED MYLAR)	A3
B11	YELLOW(GREEN MYLAR)	B11
B10	BLUE(GREEN MYLAR)	B10
B2	YELLOW(YELLOW MYLAR)	B2
B3	BLUE(YELLOW MYLAR)	B3
A11	YELLOW(LUCENCY MYLAR)	A11
A10	BLUE(LUCENCY MYLAR)	A10
A8	RED(32AWG)	A8
B8	BLACK(32AWG)	B8
SHELL	BRAID	SHELL

- NOTES:
- 1.ELECTRICAL TEST:100%OPEN,SHORT&MIS WIRE TEST.
  - 2.CONTACT RESISTANCE:2 ohm,
  - 3.INSULATOR RESISTANCE:10 ohm.
  - 4.HIGH VOLTAGE:DC 300V 0.01sec.
  - 5.MUST BE ROHS COMPLIANT.

NO.	PART NO	ITEM	DESCRIPTION	QTY	UNIT
⑦	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
⑥	G.035523.3100R	SCREW	M3 NUT	2	PCS
⑤	C.000000.0000R	MOLDING	PE	4.5	G
④	C.045P06.0100R	MOLDING	PVC 45P BLACK	11.5	G
③		CONNECTOR	USB 3.0 TYPE C/M Black rubber core iron shell plating nickel	1	PCS
②		CONNECTOR	USB 3.0 TYPE C/F Black rubber core iron shell plating nickel	1	PCS
①		CABLE	(32AWG*1P+D+AL+MY)*1C+(32AWG*1P+AL+MY)*4C+30AWG*1P+24AWG*1C+32AWG*2C +AL+D+B JACKET PVC 60P BLACK OD=4.3±0.1mm L=200MM	1	PCS

RoHS COMPLIANT			 <b>朋联电子有限公司</b> DongGuan PengLian Electronics Co.,Ltd TEL:076938835098/38835095 FAX:076938835091		
DRAWN BY	袁小政	20190515	比例: FREE	TITLE: USB 3.0 TYPE C/F TO USB 3.0 TYPE C/F	
CHECKED BY			单位: mm	SUPPLIER`S ITEM: 9.00ACCA2517.000R	
APPROVED BY				CUSTOMER: SPARK FUN	
				CUSTOMER`S ITEM:	
			DRAWING NO. ACCA-2517	DATE	2019.05.15